LED M8 2430 / LED M8 3030 / LED M8 3630 / LED M8 4830 / LED M8 6030

**BATHROOM MIRROR** w/ LED Lighting and Defogger INSTALLATION GUIDE



### IMPORTANT SAFETY INSTRUCTIONS

When using an electrical furnishing, basic precautions should always be followed, including the following:



DANGER

#### READ AND FOLLOW ALL INSTRUCTIONS BEFORE USING THIS MIRROR.

**WARNING** To reduce the risk of burns, fire, electric shock or injury to persons. Use this furnishing only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer. Never drop or insert any object into any opening. Do not use outdoors.

> WARNING Risk of electric shock. Connect this furnishing to a properly grounded circuit only. See Grounding instructions.


# **GROUNDING INSTRUCTIONS:**

This product must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the product.

An Electrical option cabinet must be wired to a 20 Amp GFI (Ground Fault Interrupter) protected circuit when used in bathrooms and all other locations required by the National Electric Code.

## PLEASE SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

LED M8 2430 / LED M8 3030 / LED M8 3630 / LED M8 4830 / LED M8 6030 | INSTALLATION GUIDE

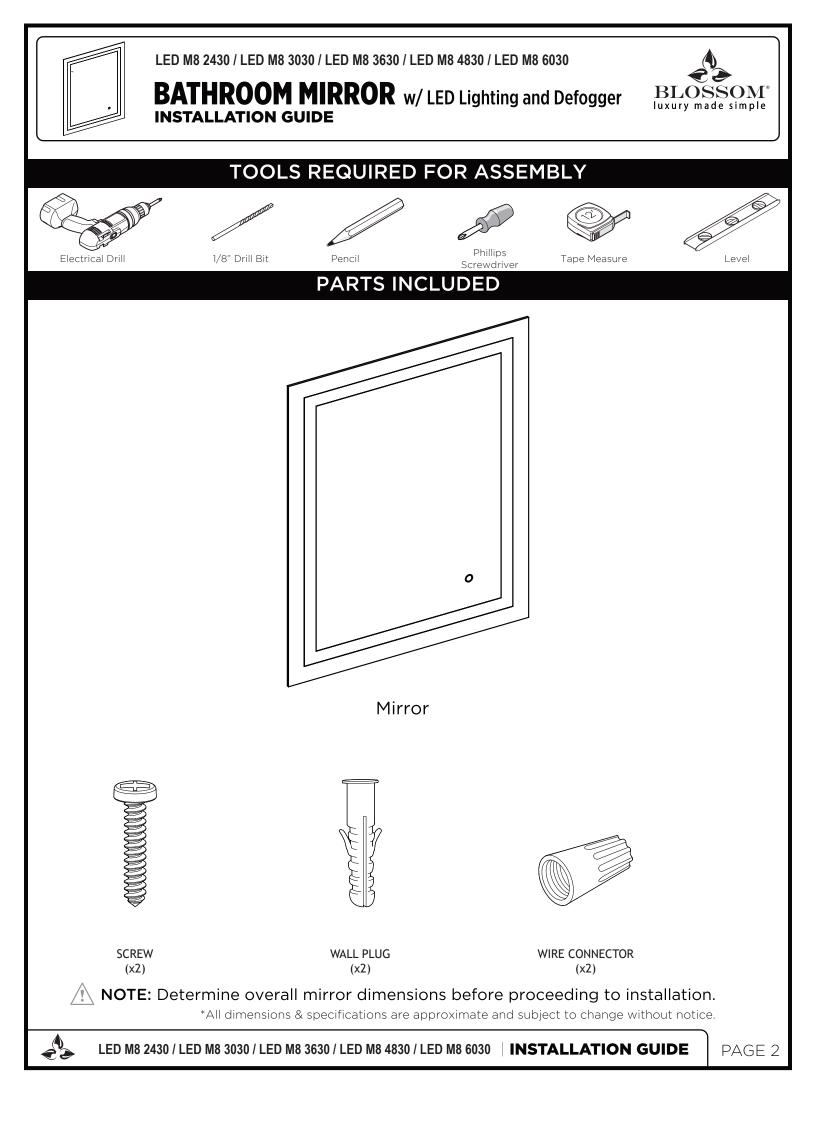

LED M8 2430 / LED M8 3030 / LED M8 3630 / LED M8 4830 / LED M8 6030

**BATHROOM MIRROR** w/ LED Lighting and Defogger INSTALLATION GUIDE



## **ELECTRIC CONNECTIONS**

ALL WIRING SHOULD BE DONE BY A QUALIFIED LICENCED ELECTRICIAN


**WARNING:** Shut off power before wiring the mirror.




**WARNING:** An Electrical option mirror must be wired to a 20 Amp GFI (Ground Fault Interrupter) protected circuit when used in bathrooms and all other locations required by the National Electric Code.

**WARNING:** This mirror must be connected to a grounded, metal permanent wiring system or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment grounding terminal or lead on the mirror.

CAUTION: Requires 120 VAC 20 Amp GFI protected circuit.

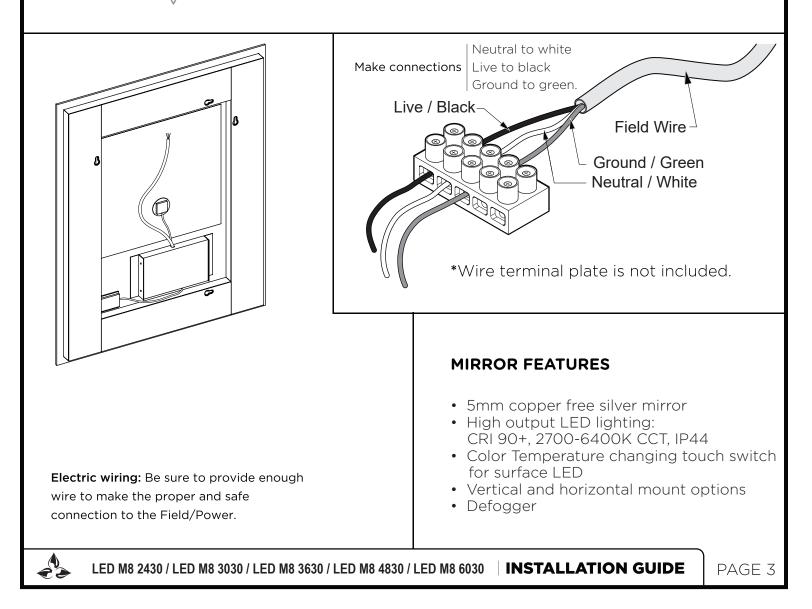

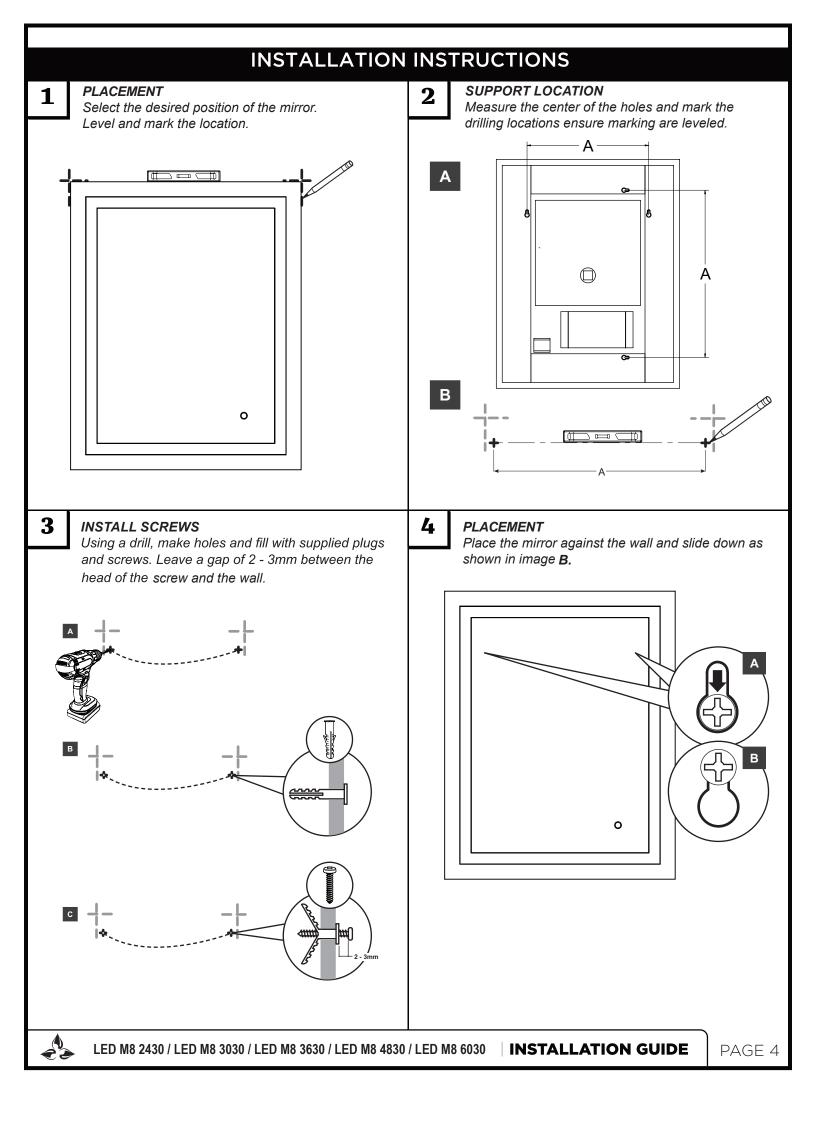

## FINAL ASSEMBLY

### How to use Defogger Switch and Dimmer Switch:

Touch () to turn the task light and defogger on or off.

Press and hold () to change the color temperature of the task light.

### Use and Maintenance:

#### CAUTION:

Mirror and mirror's body are constructed of mirrored glass and aluminum. Use a damp cloth to clean your mirrors. Do not use any abrasive material as it may damage the surface and finish of the mirror. A mild detergent may be used to clean the surfaces of the mirror. When cleaning spray the cloth, not the mirrors or surrounding surfaces.

#### TROUBLESHOOTING:

For service and parts information please email:

### Info@BlossomUS.com

Please visit our website for more information.

### www.BlossomUS.com